

# INSTALLATION INSTRUCTIONS

## FUEL PULSE DAMPER KIT

### MKIV SUPRA (JZA80)

Document: 19-0380

Support: info@radiumauto.com

Working under the vehicle is required.  
This installation is best performed with the vehicle raised on a lift.  
If a lift is not available, be prepared to raise and safely support the vehicle.  
When installing any part which has an O-ring, lubricate with light oil.

#### CAUTION

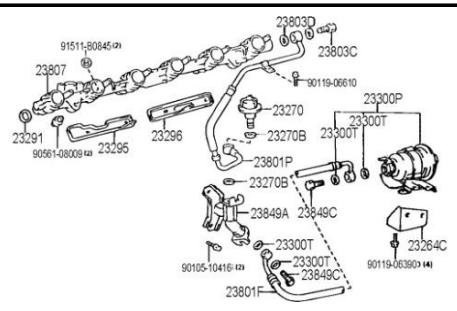
Only a qualified technician following applicable safety procedures should perform the installation of this product. One must have knowledge in repair and modification of fuel systems and general vehicle modifications to install this product.

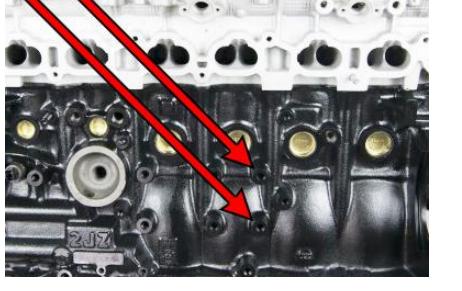
**Gasoline and other fuels are flammable and can be explosive.**

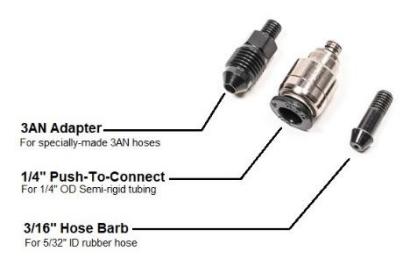
Only install in a well-ventilated location to minimize buildup of fuel vapors. No sparks, open flames, smoking or other ignition sources are to be present. Draining and removal of all fuel from the fuel system is recommended. Proper eye and personal protection is required at all times during installation.

#### WARNING

The fuel system is under pressure! Do not loosen any connections until relieving the fuel system pressure. Consult a service manual for instructions on relieving fuel pressure safely. This product is designed for off-highway and racing use only. Fuel system components may not be legal for sale or use on emissions controlled motor vehicles. Consult local, state, and federal laws.

STEP	TOOLS NEEDED	INSTRUCTIONS	PHOTO
1	10mm Socket	Open the trunk.	
		Unclip and remove the trunk cover, carpet, and spare tire.	
		To uninstall the fuel tank access cover in the center of the trunk, remove the 6 perimeter nuts.	
2	10mm Socket	To depressurize the fuel system, first squeeze the tab and unplug the gray wiring connector on top of the pump housing (shown). Start the engine and allow it to stall. Remove the key from the ignition. Unscrew the gas tank filler cap temporarily to relieve any residual pressure.	
		Pop the hood and disconnect the battery's negative terminal. CAUTION: Disconnecting the battery may cancel fault memories of some control units. Consequently, before disconnecting the battery, note any fault memories.	
3	17mm Socket	Safely lift and secure the vehicle. Find the fuel filter just left of the transmission. Not necessary, but it is a good idea to inspect and potentially replace the OEM fuel filter. Toyota P/N: 2330049195.	
	19mm Wrench		
	5/8" (16mm) Wrench	On the fuel filter outlet, use a 17mm socket breaker bar on the banjo bolt and a 19mm wrench on the fuel filter inlet hex. Be prepared with a rag as fuel will leak out of this connection.	
		Install the included crush washer and adapter fitting to the filter outlet.	
4	17mm Wrench	From the engine bay, remove the fuel rail feed line banjo bolt (23803C).	
	10mm Wrench	Using a 10mm wrench, remove the M6x1mm bolt (90119-06610) that secures the fuel line to the intake manifold. This will not be reused.	
	12mm Wrench	Using a 12mm wrench, remove the two M10x1.25mm bolts (90105-10416) that secure the fuel pulsation damper housing (23849A) to the engine block.	

5		In one piece, pull the fuel feed line out of the vehicle.	
		This will include everything from the fuel filter outlet banjo to the fuel rail inlet, as shown.	
6	Oil Lubrication	Find the 3/8" EFI hose and a straight 6AN PushLok hose end in the kit. Lubricate the barbs and fully seat the hose end as shown.	
		NOTE: PushLok hose ends do NOT require hose clamps.	
7	7/8" (22mm) Wrench	Lubricate the O-rings and install the 6AN adapter fittings to the 8AN ORB fuel pulse damper ports. Apply PTFE thread sealant paste to the provided plug threads and install into the 1/8" NPT port.	
	PTFE Paste		
	3/16" Allen Wrench		
	5mm Allen Wrench	Using the included M6x1mm bolts and nuts, install the mounting bracket to the fuel pulse damper body.	
	10mm Wrench		
	11/16" Wrench	Install the straight hose end assembly to the damper, as shown.	
8	Light Oil		
	12mm Socket	Orientate the fuel pulse damper assembly so the attached hose is up. From underneath the vehicle, lift the assembly upwards right along the engine block and direct the unterminated hose between the cylinder 4 and 5 intake manifold runners.	
		Secure the 2-bolt assembly bracket reusing the OEM fuel pulse damper mounting bosses (shown). NOTE: The two OEM M10x1.25mm bolts are Toyota P/N: 90105-10416.	
9	11/16" Wrench	Find the provided PTFE hose in the kit which has a straight hose end and a 45 degree hose end.	
		Install the 45 degree hose end on the fuel pulse damper lower inlet port.	
		Install the straight hose end on the fuel filter outlet fitting, as shown.	
10	5mm Allen Wrench	Note how the fuel hose is plumbed near the engine block, through the intake manifold runners and away from the fuel rail.	
		Use the included P-clamp and M6x1mm bolt to secure the fuel hose to the intake manifold boss between cylinder 5 and 6. NOTE: The P-clamp can be rotated 180 degrees from the position pictured.	

11	5/8" (16mm) Wrench 7/8" (22mm) Wrench Light Oil	To connect the 180 degree hose end to the fuel rail rear port, 1 of the 2 provided 6AN fittings will need to be installed to the fuel rail.  The metric fitting (shown left) is required for the OEM side feed fuel rail.  The 8AN ORB fitting (shown right) can be used on aftermarket fuel rails that use a 3/4"-16 threaded 8AN ORB rear port. Before installing, lubricate the integrated O-ring.	
12	5/8" (16mm) Wrench	If installing the metric adapter fitting to the OEM fuel rail, be sure to use the included crush washer, as shown.  Next, temporarily thread the 180 degree hose end to the rear fuel rail 6AN fitting.	
13	Hose Cutter Oil Lubrication	Line up the rubber EFI hose (from the fuel pulse damper) to the 180 degree hose end. Cut the hose to length.  Remove the 180 degree hose end and lubricate the barbs. Fully seat the hose end. NOTE: PushLok hose ends do NOT require hose clamps.	
14	5mm Allen Wrench 11/16" Wrench	Install the 180 degree hose end to the rear fuel rail port.  NOTE: If a top feed fuel rail with tall fuel injectors is being used, the P-clamp can be orientated as shown.	
15	5mm Allen Wrench	If the OEM side feed fuel rail or a low profile top feed fuel rail is being used, the P-clamp can be rotated as shown.	
16	5mm Allen Wrench	If total fuel pressure will exceed 70psi, a vacuum hose must be connected from the fuel pulse damper to the intake manifold for optimal efficiency. There are 3 different adapters provided, as shown.  If fuel pressure will never exceed 70psi, install the provided #10-32 screw (not shown) to plug the fuel pulse damper vacuum port.	

17	<p>Thread Locker</p> <p>When installing the vacuum port adapters, use a wicking thread locking compound, such as LOCTITE 290. Take care not to allow the thread locking compound into the air passage of the vacuum adapter. Simply finger tighten the fitting.</p>	
18	<p>Reinstall all components in reverse order. Turn the key to the ON position and check for leaks. Start the engine and recheck for leaks.</p> <p><b>INSTALLATION COMPLETE</b></p>	