

# INSTALLATION INSTRUCTIONS

## 2016+ HONDA CIVIC FUEL FILTER MOUNT



Document: 19-0381

Support: info@radiumauto.com

### CAUTION

Only a qualified technician following applicable safety procedures should perform the installation of this product.  
One must have knowledge in repair and modification of fuel systems and general vehicle modifications to install this product.

**Gasoline and other fuels are flammable and can be explosive.**

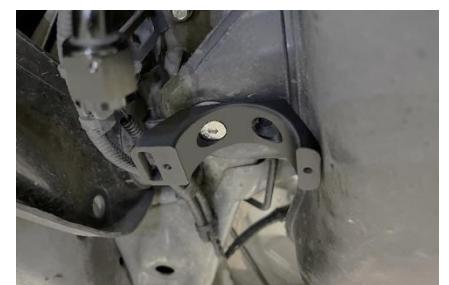
Only install in a well-ventilated location to minimize buildup of fuel vapors.

No sparks, open flames, smoking or other ignition sources are to be present. Draining and removal of all fuel from the fuel system is recommended.  
Proper eye and personal protection is required at all times during installation.

### WARNING

The fuel system is under pressure! Do not loosen any connections until relieving the fuel system pressure.  
Consult a service manual for instructions on relieving fuel pressure safely. This product is designed for off-highway and racing use only.  
Fuel system components may not be legal for sale or use on emissions controlled motor vehicles. Consult local, state, and federal laws.

STEP	TOOLS NEEDED	INSTRUCTIONS	PHOTO
1	10mm Wrench	Prior to beginning, be sure not to work on a full fuel tank.	
		The terms "driver-side" and "passenger-side" will NOT be referenced. As depicted, these instructions will always reference "LH" and "RH" areas of the vehicle.	
		Disconnect the negative terminal on the battery.	
2	Flat Blade	Safely lift the car. The plastic lower panel located at the LH rear of the vehicle will need to be uninstalled.	
		To remove the 8 plastic clips, carefully pry and pull.	
3	17mm Socket	Remove the 3 large plastic nuts.	
4	10mm Socket	Remove the four M6x1mm screws.	

5		Shown is all the hardware laid on top of the removed plastic lower panel.	
6	12mm Socket	Support the LH portion of the fuel tank. Remove the OEM M8x1.25mm mounting hex bolt that secures the outer LH side of the fuel tank.	
7	5mm Allen Wrench	Using the provided countersunk M8x1.25mm socket head screw, install the upper portion of the fuel filter mount.  NOTE: The orientation and bolt hole location shown is for all 2016+ Honda Civics, excluding the FL5 Type-R. The other (empty) countersink hole in the fuel filter mount is used only for the FL5 Civic Type-R fuel tank.	
8	Thread Locker 4mm Allen Wrench	NOTE: A fuel filter, fittings, hose, etc. are not included.  Apply a medium-strength thread locker to the two M5x0.8mm socket head screws provided and secure the lower mount clamp, as shown.	
9	10mm Socket	After the system is plumbed, reinstall the battery. Start the engine and check for leaks.  <b>INSTALLATION COMPLETE</b>	